



LIVE PRODUCTION | SHOWS | SPORTS
WORSHIP | SCHOOLS | FILMING MONITOR | WEDDING

2-channel Full-HD Video Wireless Transmission

BeamLink-Duo

- Support 2 Full-HD video channels transmission simultaneously
- 2 transmitters operate in 1 RF channel, multiple RF channels are available
- Up to 700m/2295ft transmission distance, LOS
- Ultra low latency, meet the needs of professional scenes
- Support 4x4MIMO & Beamforming, enhance anti-interference capacity
- Support Tally, Timecode, Star/stop recording trigger
- Supports IP streaming (RTSP)
- RS232(RS422 optional) for control data transmission




SHENZHEN CRYSTAL VIDEO TECHNOLOGY CO.,LTD
ADD: F13,F518 Idea Land,Baoyuan Road,Baoan Central Area,Shenzhen,China
Post code : 518102
Tel: +86-755-26716688-6652
E-mail: Sales@cv-hd.com


www.cv-hd.com
Fax: +86-755-29188427
E-mail: Marketing@cv-hd.com

Interface Information

Ordering information	Ordering NO.	Description	Unit/Set
	7060	TX	2
	3062	RX	1

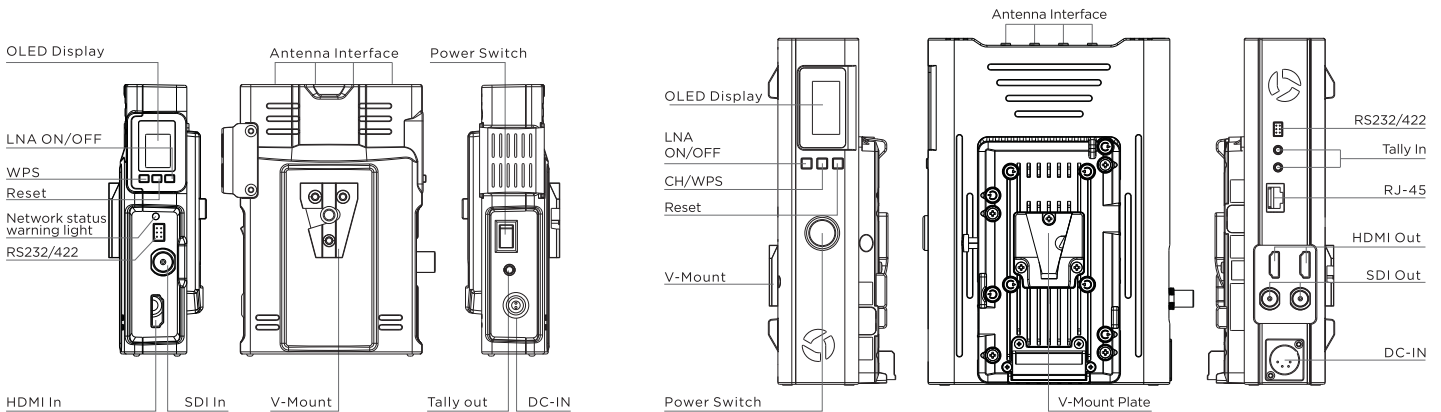

Beamlink-Duo Application Diagram

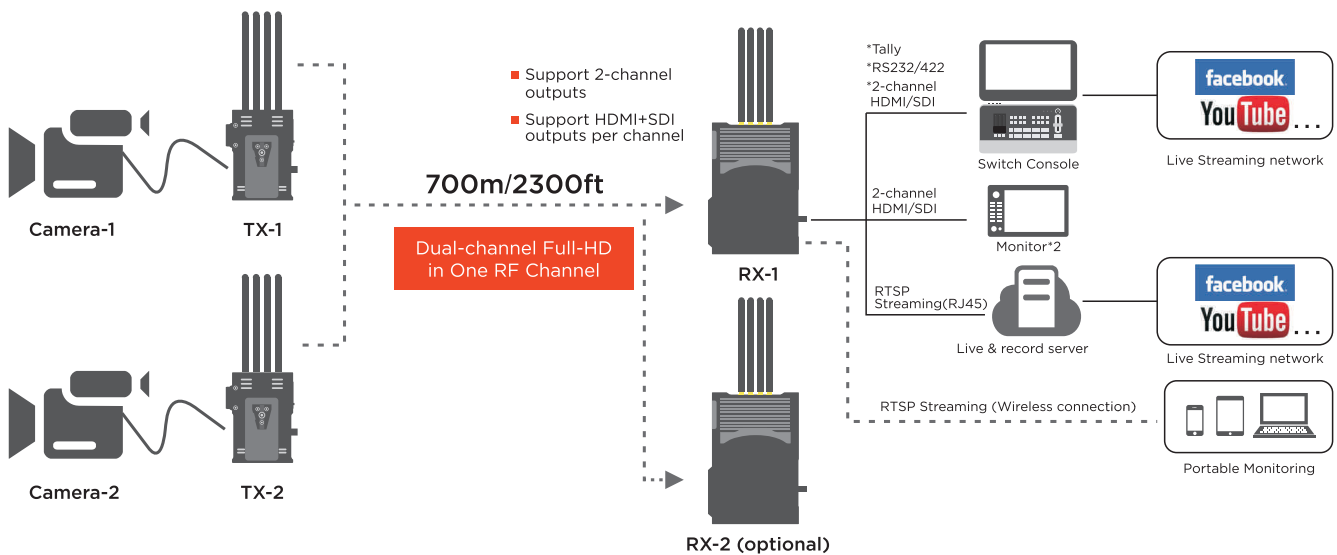

TX1 & TX2: Beamlink-Duo		RX: Beamlink-Duo	
Antenna Mode	4x4 MIMO and Beamforming	Antenna Mode	4x4 MIMO and Beamforming
Transmission power	17dBm	Receiving Sensitivity	-70dBm
Operating Frequency	5.1-5.8GHz	Operating Frequency	5.1-5.8GHz
Input	HDMI, 3G-SDI	Input	RS232/422*1, Tally*2
Output	Tally, RS232/422	Output	HDMI*2, 3G-SDI*2, RJ45*1
Operating voltage	7-17V	Bandwidth	40MHz
Transmission Distance	700m(video code rate: 8Mbps per channel)	Operating voltage	7-17V
Power Consumption	10W	Transmission Distance	700m(video code rate: 8Mbps per channel)
Product Size	94(L)*39(W)*126(H)	Power Consumption	13W
Audio Format	PCM, MPEG-2	Product Size	139(L)-52(W)-199(H)
Temperature	-10-50°C(Working);-20-80°C(Storage)	Audio Format	PCM, MPEG-2
		Temperature	-10-50°C(Working);-20-80°C(Storage)

