



LIVE PRODUCTION | SHOWS | SPORTS
WORSHIP | SCHOOLS | FILMING MONITOR | WEDDING

4-channel Full-HD Video Wireless Transmission

BeamLink-Quad

- Support 4 Full-HD video channels transmission simultaneously
- Up to 500m/1640ft transmission distance, LOS
- 4 transmitters operate in 1 RF channel, multiple RF channels are available
- Ultra low latency, meet the needs of professional scenes
- Support 4x4MIMO & Beamforming, enhance anti-interference capacity
- Support Tally, Timecode, Star/stop recording trigger
- Supports IP streaming (RTSP)



SHENZHEN CRYSTAL VIDEO TECHNOLOGY CO.,LTD

ADD: F13,F518 Idea Land,Baoyuan Road,Baoan Central Area,Shenzhen,China

Post code : 518102

Tel: +86-755-26716688-6652

E-mail: Sales@cv-hd.com


www.cv-hd.com

Fax: +86-755-29188427


E-mail: Marketing@cv-hd.com

Interface Information

Ordering information	Ordering NO.	Description	Unit/Set
	7060	TX	4
	3060	RX	1

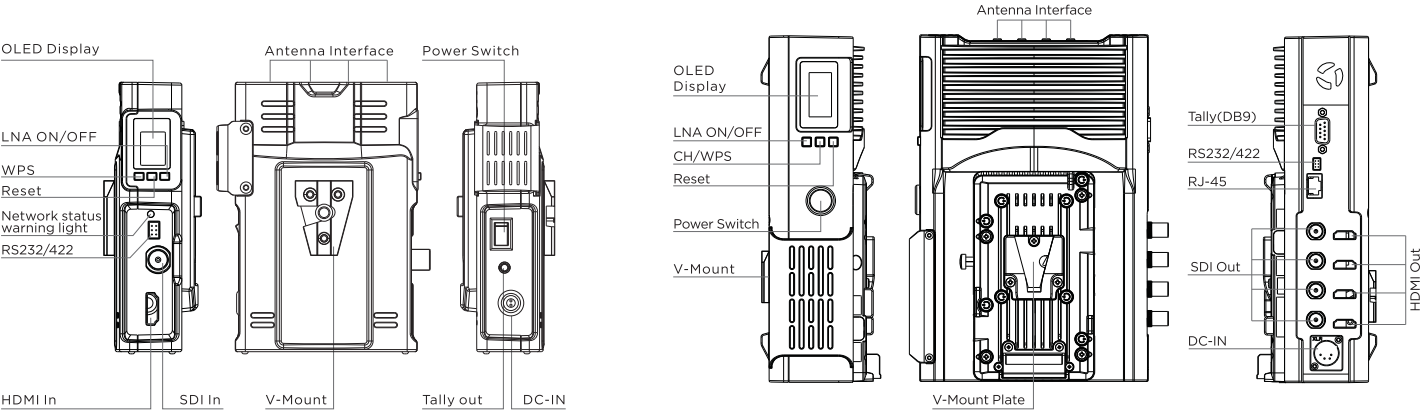

Beamlink-Quad Application Diagram

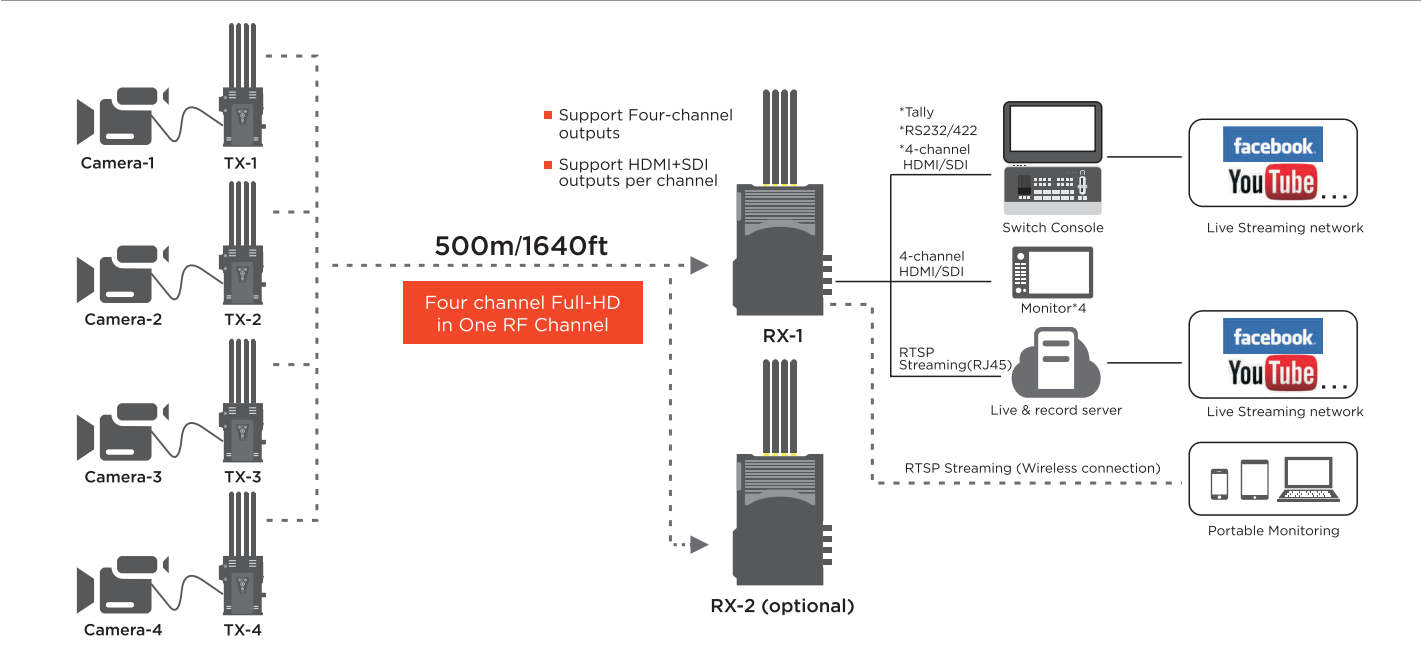

TX1 - TX4: Beamlink-Quad		RX: Beamlink-Quad	
Antenna Mode	4x4 MIMO and Beamforming	Antenna Mode	4x4 MIMO and Beamforming
Transmission power	17dBm	Receiving Sensitivity	-70dBm
Operating Frequency	5.1-5.8GHz	Operating Frequency	5.1-5.8GHz
Input	HDMI, 3G-SDI	Input	RS232/422*1, Tally(DB9)
Output	Tally, RS232/422	Output	HDMI*4, 3G-SDI*4, RJ45*1
Operating voltage	7-17V	Bandwidth	40MHz
Transmission Distance	500m(video code rate: 8Mbps per channel)	Operating voltage	7-17V
Power Consumption	10W	Transmission Distance	500m(video code rate: 8Mbps per channel)
Product Size	96(L)*46(W)*127(H)	Power Consumption	20W
Audio Format	PCM, MPEG-2	Product Size	176(L)*81(W)*235(H)
Temperature	-10-50°C(Working); -20-80°C(Storage)	Audio Format	PCM, MPEG-2
		Temperature	-10-50°C(Working); -20-80°C(Storage)

