


## **Safety Instructions**


- DO NOT look into the light source. Be cautious of the high-intensity beam.
- DO NOT disassemble V360. This will void the warranty.
- DO NOT install V360 in damp or wet locations.
- DO NOT obstruct the fixture's air vents.
- Only use Fillex approved power supply and accessories. Failure to do so may damage the fixture.

## **Fixture Settings**

Intensity	Turn the Intensity Knob (11) to adjust brightness.
ССТ	Turn the CCT Knob (7) to adjust color temperature.
DMX Control	Double click the DMX Knob (11) to set a DMX address (Range: 1 - 510).  When a DMX address is selected, the fixture will automatically assign the next addresses in the following order: <b>1.</b> Intensity <b>2.</b> CCT

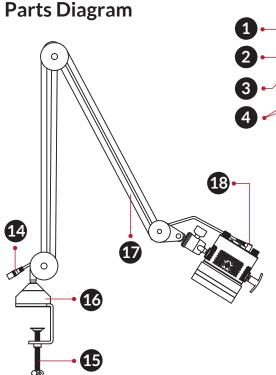

- 3
  - **1.** Side Vents
  - 2. Foam Rubber Bumper
  - 3. Handle
  - 4. Accessory Locking Magnet
  - **5.** Accessory Locking Pin
  - J. Accessory Locking I III
  - **6.** Ball Joint (To adjust the tilt angle of the fixture)
  - 7. CCT Knob
  - 8. DMX Input Jack
  - 9. On / Off Button

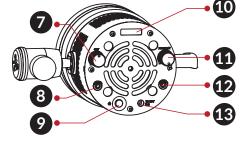

- **10.** OLED Display
- 11. Intensity / DMX Knob
- 12. DMX Output Jack
- 13. DC Power Input Jack
- 14. Power Cable
- **15.** Clamp Knob (Turn it clockwise to mount the fixture)
- 16. Desk Mount
- 17. Adjustable Arm
- 18. DC Power Plug

210224A