

# Blackmagic Video Assist 5" 3G



**\$495**

Blackmagic Video Assist 5" 3G is a portable monitor, a professional recorder, a portable scope and a fantastic camera viewfinder solution! You can also add better quality record codecs and a larger monitor to any SDI or HDMI camera! The new design has innovations such as 4 built in scopes, enhanced focus assist features, a tally indicator and built in 3D LUTs. The Video Assist 5" 3G support formats up to 1080p60 and the new design also has L-Series batteries for longer life. Blackmagic Video Assist 5" 3G really is 4 products in one!

## Connections

### SDI Video Inputs

1 x Micro BNC

### SDI Video Outputs

1 x Micro BNC

### SDI Rates

270Mb, 1.5G, 3G

### HDMI Video Inputs

1

### HDMI Video Outputs

1

### Analog Audio Inputs

None, embedded audio only.

### Analog Audio Outputs

1 x 3.5mm headphone jack.

### Built in Speaker

Mono

### Screen Dimensions

5 inch 1920 x 1080.

### Screen Brightness

300nits

### SDI Audio Inputs

16 channels embedded via SDI

### SDI Audio Outputs

16 channels embedded via SDI

### HDMI Audio Inputs

8 channels embedded via HDMI

### HDMI Audio Outputs

8 channels embedded via HDMI

### Remote Control

None

### SD Interface

1 x UHS-I SD slot.



### Storage Type

SDXC UHS-I and SDHC UHS-I SD cards.




Supports DS, HS, SDR12, SDR25, DDR50, SDR50 and SDR104 SD cards.

### Computer Interface

1 x USB Type-C for webcam out, initial setup, software updates and Video Assist Utility software control.

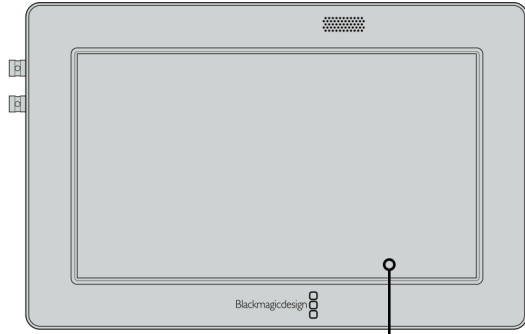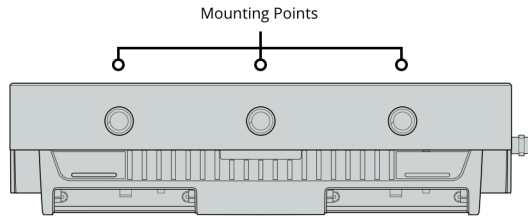

5 Inch 1080p60 Touchscreen

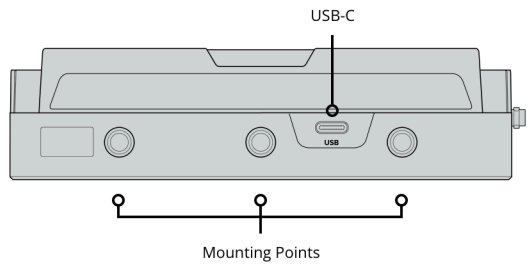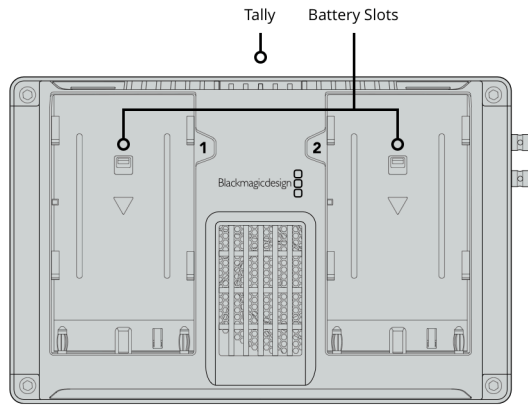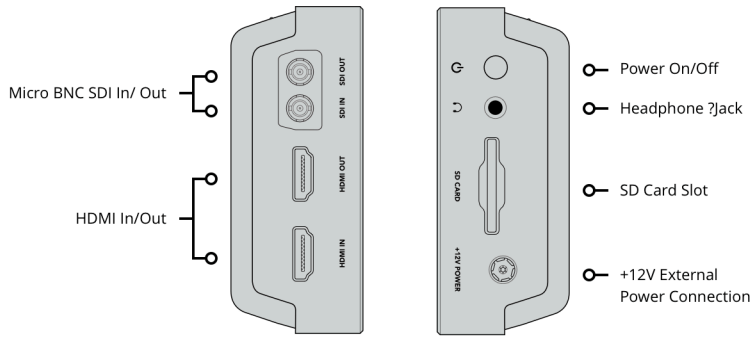

---

## SDI Video Standards

### SD Video Standards

525i59.94 NTSC, 625i50 PAL

### HD Video Standards

720p50, 720p59.94, 720p60  
1080p23.98, 1080p24, 1080p25,  
1080p29.97, 1080p30, 1080p50,  
1080p59.94, 1080p60  
1080PsF23.98, 1080PsF24,  
1080PsF25, 1080PsF29.97, 1080PsF30  
1080i50, 1080i59.94, 1080i60

### 2K Video Standards

2Kp23.98 DCI, 2Kp24 DCI,

2Kp25 DCI  
2KPsF23.98 DCI, 2KPsF24 DCI,  
2KPsF25 DCI

### SDI Compliance

SMPTE 259M, SMPTE 292M,  
SMPTE 296M, SMPTE 425M

### SDI Metadata Support

HD RP188

### Audio Sampling

Television standard sample rate of  
48 kHz and 24-bit.

### Video Sampling

4:2:2 YUV

### Color Precision

10-bit

### Color Space

REC 601, REC 709

### Multiple Rate Support

SDI and HDMI switches between  
270 Mb/s, 1.5 Gb/s and 3 Gb/s.

---

## HDMI Video Standards

### SD Video Standards

525i59.94 NTSC, 625i50 PAL

### HD Video Standards

720p50, 720p59.94, 720p60  
1080p23.98, 1080p24, 1080p25,  
1080p29.97, 1080p30, 1080p50,  
1080p59.94, 1080p60  
1080i50, 1080i59.94, 1080i60

### HDMI Color Precision

10-bit

### Copy Protection

HDMI input is unable to capture from  
copy protected HDMI sources. Always  
confirm copyright ownership before  
capture or distribution of content.

---

## Media

### Media

1 x UHS-I SD for HD recording.

### Media Type

SDXC UHS-I and SDHC UHS-I  
SD cards.

---

## Supported Codecs

ProRes 422 HQ, ProRes 422, ProRes  
422 LT, ProRes 422 Proxy, DNxHD  
220x, DNxHD 145, DNxHD 45, DNxHD  
220x MXF, DNxHD 145 MXF, DNxHD  
45 MXF.

---

## Control

### Recorder Control

Integrated capacitive touchscreen LCD with Blackmagic OS onscreen controls for settings and navigating menus.

### External Control

SDI and HDMI start/stop, timecode run.

---

## Software

### Software Included

Blackmagic OS

---

## Scopes

### Scopes


Waveform, RGB Parade, Vector, Histogram.

### Viewing Modes

Scopes with picture in picture or picture overlay and opacity control.

---

## Operating Systems



Mac 10.14 Mojave,  
Mac 10.15 Catalina or later.



Windows 8.1 and 10.

---

## Power Requirements

### Power Supply

1 x External 12V power supply.  
Compatible with Sony NP-F style  
batteries.  
(batteries not included)

---

## Physical Specifications



---

## Environmental Specifications

### Operating Temperature

0° to 40° C (32° to 104° F)

### Storage Temperature

-20° to 45° C (-4° to 113° F)

### Relative Humidity

0% to 90% non-condensing

---

## What's Included

Blackmagic Video Assist 5" 3G

Universal power supply with international adapters

---

## Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2021, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller